





Front 1:1

Side 1:1

Back 1:1

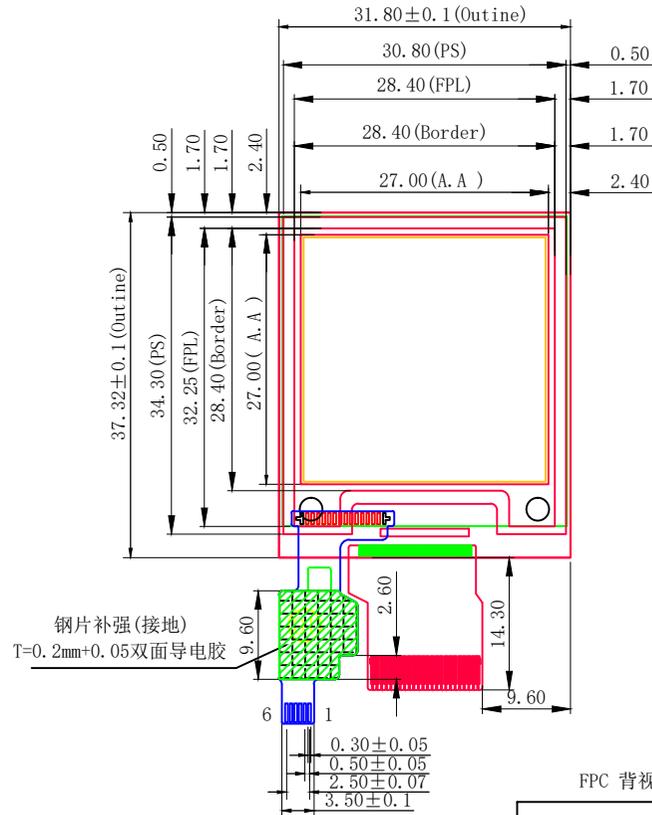

FPC 背视图1:1

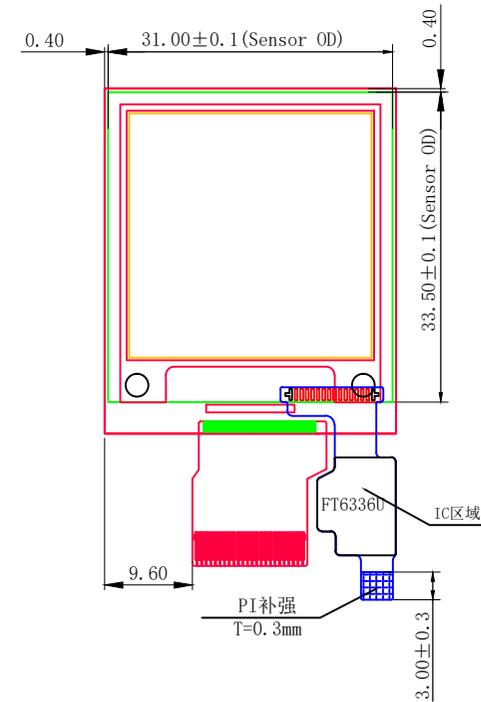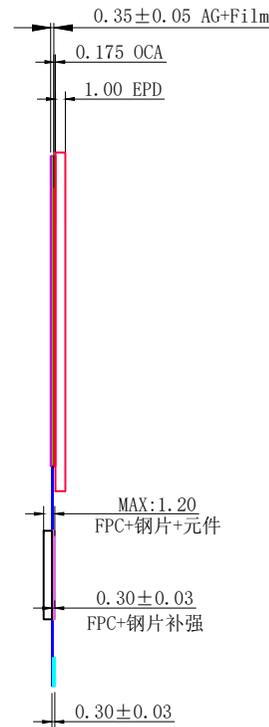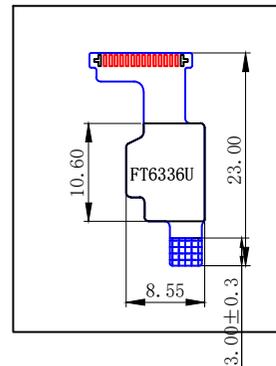

- TP Pin define
- Pin 6 - GND
 - Pin 5 - INT
 - Pin 4 - RST
 - Pin 3 - VDD
 - Pin 2 - SCL
 - Pin 1 - SDA

- Technical Parameter:
1. Full bonding process
 2. Touch IC: FT6336U
 3. Touch Voltage: 2.8-3.6V
 4. Surface hardness: $L \geq 6H$
 5. Operating Environment: $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$, 40%RH ~ 70%RH
 6. Storage Environment: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$, 40%RH ~ 70%RH
 7. Unmarked Dimensional Tolerances: $\pm 0.2\text{mm}$

DALIAN GOOD DISPLAY CO., LTD		
DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GDEY0154D67-T03	VIEW:
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	投影方式: 第三角投影法
APPROVED BY: 批准:	DATE: 日期: 2022-11-02	UNITS: 单位: mm
Standard tolerance: 公差:	WEBSITE: 网址: www.good-display.com	SCALE: 比例: 1:1