



文件编号:

版本	修改记录	记录人	日期
V0	初版发行。		2024-07-31


前视图 1:1

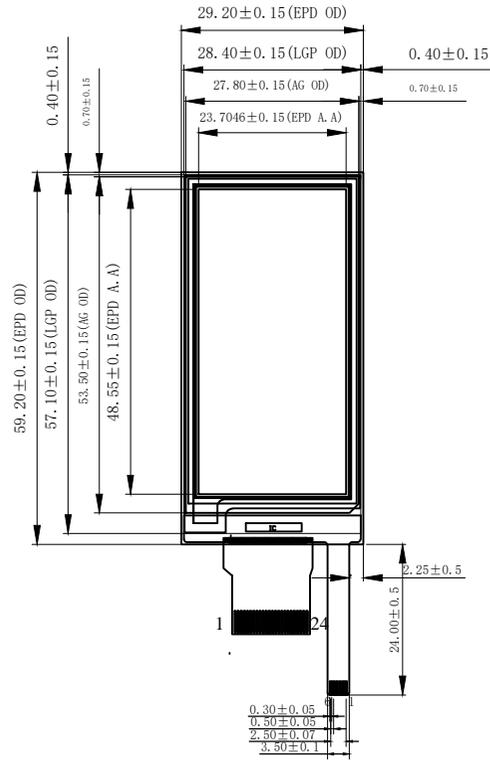

侧视图 横向10:1

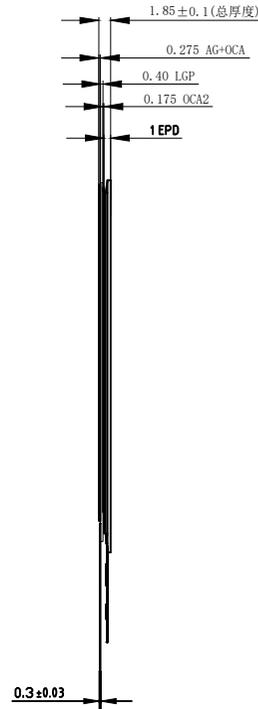

后视图 1:1

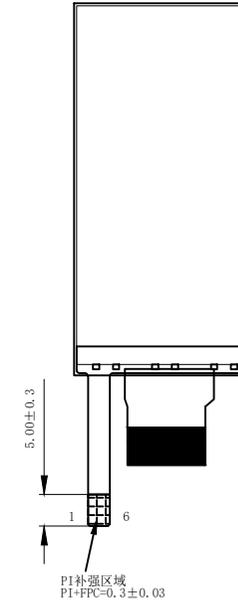


客户确认签字:

Technical Parameter:

1. Full bonding process
2. Front light 3PCS LED parallel connection
3. Front light Voltage: 2.8-3.3V
4. Surface hardness:  $\geq 2H$
5. Operating Environment:  $0^{\circ}C \sim +50^{\circ}C$ , 40%~70%RH
6. Storage Environment:  $-25^{\circ}C \sim +70^{\circ}C$ , 40%~70%RH
7. Unmarked Dimensional Tolerances:  $\pm 0.2mm$

CIRCUIT DIAGRAM(LED 1\*3=3 DIES)



IP=45mA@Vf=3.3V(CONSTANT)

LED-FPC PIN

DALIAN GOOD DISPLAY CO., LTD

FL Pin define		DRAWN BY:	PRODUCT MODEL:	VIEW:
1	A(+)	绘图:	产品型号: GDEY0213B74-FL11	
2	A(+)	CHECKED BY:	CUSTOMER ID:	
3	NC	审核:	客户编号:	
4	NC	APPROVED BY:	DATE:	UNITS: mm
5	K(-)	批准:	日期:	单位:
6	K(-)	公差:	WEBSITE:	SCALE: 1:1
			网址:	比例: