




Front 1:1

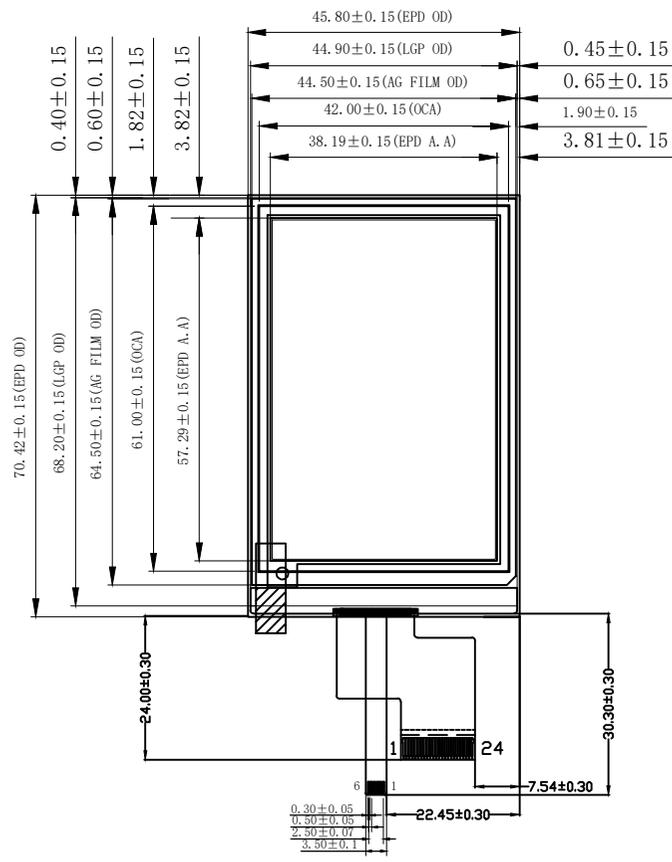

Side 1:1

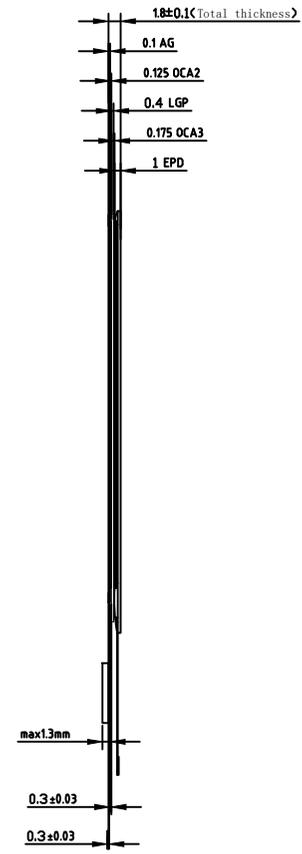


Back 1:1

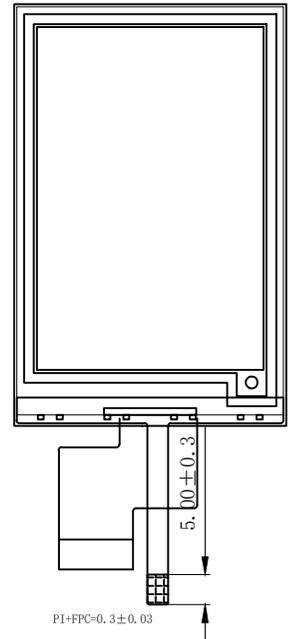

Technical Parameter:

1. Full bonding process
2. Number of front lights: 4 lights in series
3. Front light Voltage: ≤ 12V
4. Surface hardness: L ≥ 3H
5. Operating Environment: 0°C ~ +50°C, 40%RH ~ 70%RH
6. Storage Environment: -25°C ~ +70°C, 40%RH ~ 70%RH
7. Unmarked Dimensional Tolerances: ± 0.2mm



FL Pin define	
1	A(+)
2	A(+)
3	NC
4	NC
5	K(-)
6	K(-)

GOOD DISPLAY

DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GDEY027T91-FL02	VIEW: 投影方式: 第三角投影法
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	UNITS 单位: mm
APPROVED BY: 批准:	DATE: 日期: 2025-07-16	SCALE 比例: 1:1
Standard tolerance: 公差:	WEBSITE: 网址:	