



front view 1:1

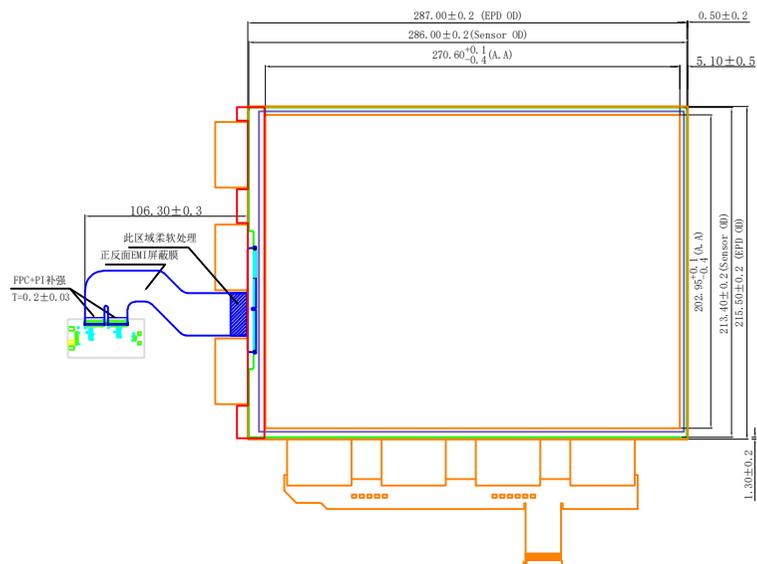


side viewhorizontal 10:1

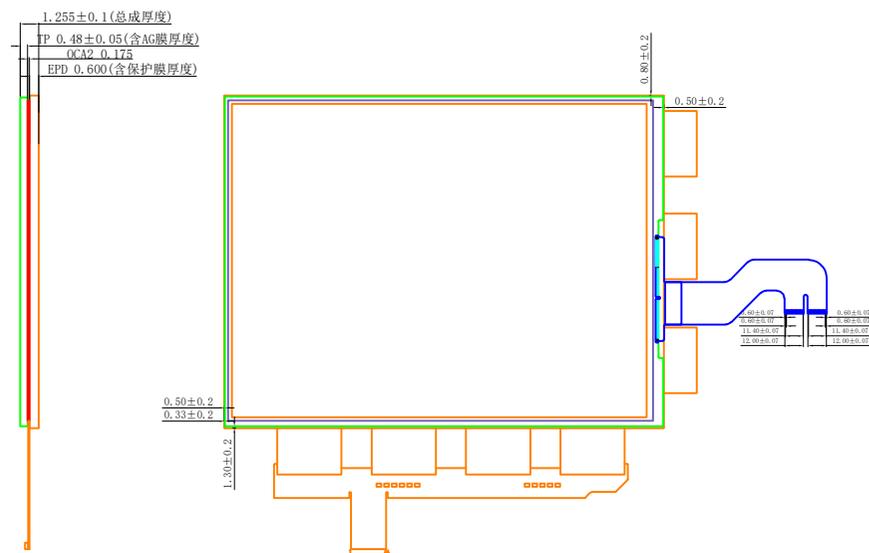

back view 1:1

Technical parameters:

1. Full laminating process AG fog 5%
2. Number of channels: GT9110H42*30 Touch IC:
3. Working voltage: 2.8V-3.3V
4. Transmittance: $\geq 85\%$
5. Surface hardness: $\geq 2H$
6. Working environment: $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$, $\leq 90\%RH$
7. Storage environment: $-30^{\circ}\text{C}\sim+80^{\circ}\text{C}$, $\leq 90\%RH$
8. No dimensional tolerance should be $\pm 0.2\text{mm}$

DALIAN GOOD DISPLAY CO., LTD 大连佳显电子有限公司		
DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号:GDEP133UT3-T	 投影方式: 第三角投影法
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	
APPROVED BY: 批准:	DATE: 日期: 2022-05-04	UNITS: 单位: mm
Standard tolerance: 公差:	WEBSITE: 网址: www.good-display.cn	CAESL 比例: 1:1