




Front 1:1

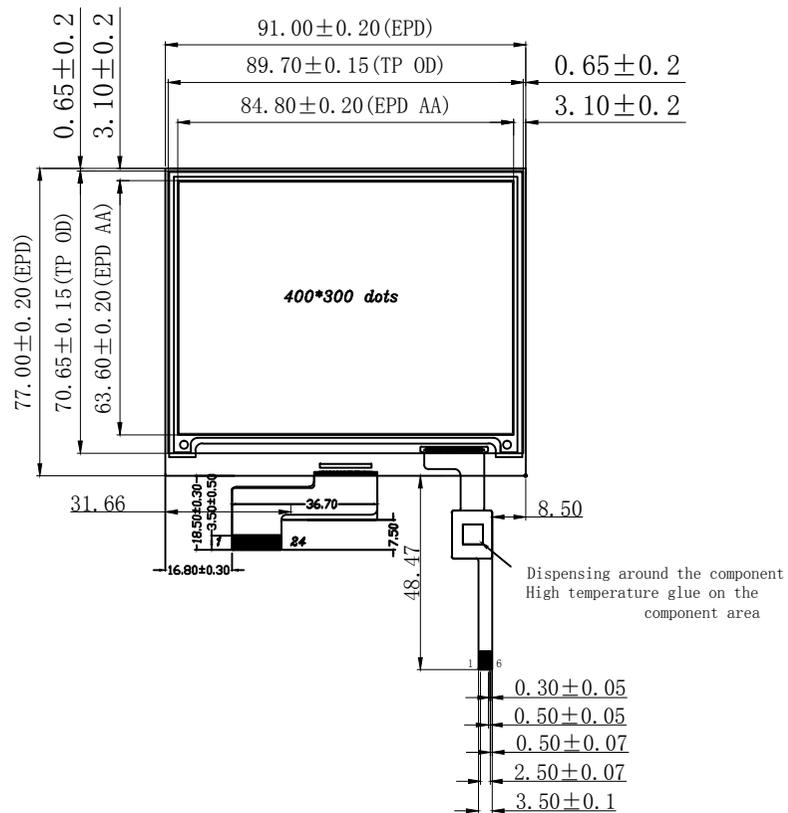

Side Horizontal 10:1

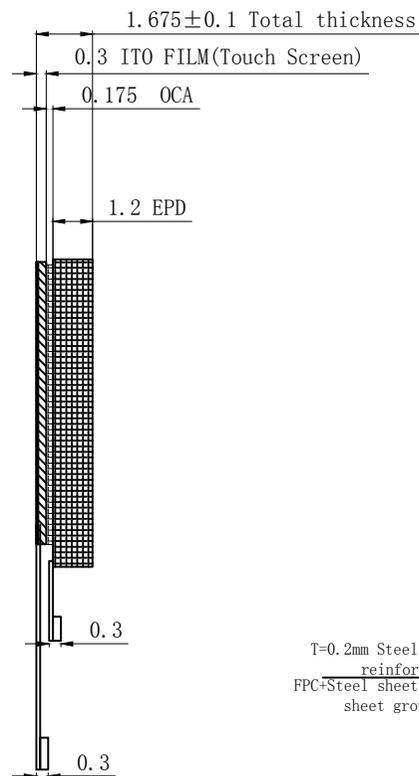

Back 1:1

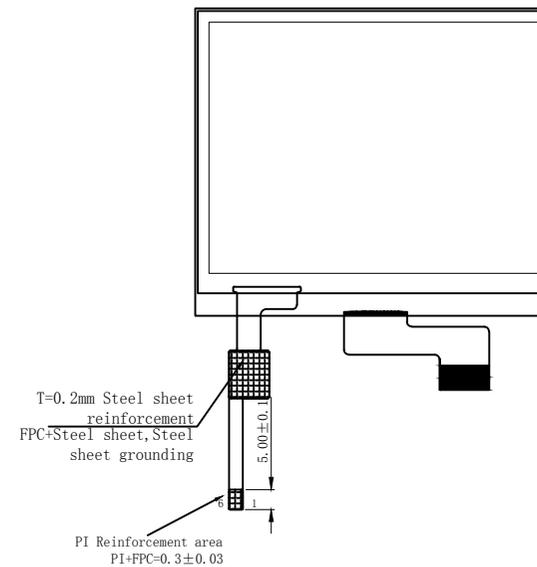

TP Pin define	
1	GND
2	VDD
3	RST
4	INT
5	SDA
6	SCL

Technical Parameter:

1. Full bonding process
2. Touch IC: FT6336
3. Touch Voltage: 2.8-3.6V
4. Surface hardness: $L \geq 6H$
5. Operating Environment: $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$, 40%RH~70%RH
6. Storage Environment: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$, 40%RH~70%RH
7. Unmarked Dimensional Tolerances: $\pm 0.2\text{mm}$

DALIAN GOOD DISPLAY CO., LTD

DRAWN BY:	PRODUCT MODEL: GDEY042T81-T02	VIEW:
CHECKED BY:	CUSTOMER ID:	
APPROVED BY:	DATE: 2024-04-24	UNITS mm
Standard tolerance:	WEBSITE: www.good-display.com	SCALE 1:1